


RECESSED LED EM DOWNLIGHT



LIGHT SPECIFICATION

LED module	Citizen CLU701-0304C4-303H5K2	
Color temp	3000K	
CRI	>90	
Light beam angle	38°	
Reflector	C11862_MINNIE-W	
Lumen output	500lm	
Luminaire power	4.8W	
Lumen maintenance	Tc nom 55°C	L80B10 – 60 000h
	Tc life 90°C	L70B20 – 60 000h
Working temp. range	-20°C ... +45°C	
Serial connected	No	
Voltage per light	9.4VDC	
Connectors	Ensto NCC21SL.G	

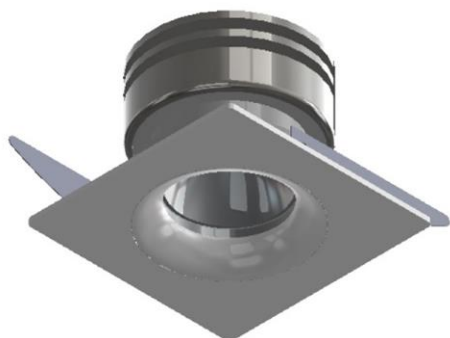

ADDITIONAL SPECIFICATION

Power supply	220-240V 50/60Hz External driver
Driver	Osram OTi DALI 15
Dimming	DALI
Connector	Ensto NCC51S.G
Adjustability	Fixed
Trim color	RAL9016
Body material	Steel machined
Fire class	B-0
Dimensions	Ø57mm x 50mm
Fixing	Springs
Cutout	Ø51mm
Emergency mode	Yes

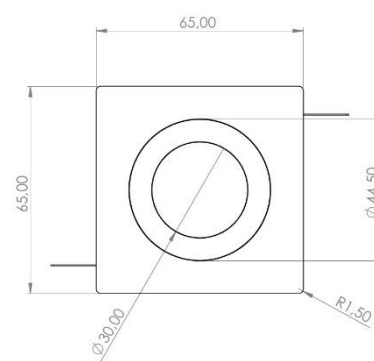

SECTION A-A

