

TDL57_{ADJ} G2

PRODUCT CODE # 057AKE930G2AC5

RECESSED LED DOWNLIGHT






LIGHT SPECIFICATION

LED module	Citizen CLU701-0304C4-303H5K2	
Color temp	3000K	
CRI	>90	
Light beam angle	25°	
Reflector	C12095_MINNIE-M	
Lumen output	500lm	
Luminaire power	4.8W	
Lumen maintenance	Tc nom 55°C	L80B10 – 60 000h
	Tc life 90°C	L70B20 – 60 000h
Working temp. range	-20°C ... +45°C	
Serial connected	3-5 lights per driver	
Voltage per light	9.4VDC	
Connectors	Ensto NCC21SL.G & NCC22SL.G	

ADDITIONAL SPECIFICATION

Power supply	220-240V 50/60Hz External driver
Driver	Philips Xitanium 40W R
Dimming	DALI
Connector for driver	Ensto NCC51S.G
Adjustability	Tilt 18°
Trim color	RAL9016
Body material	Aluminium machined
Fire class	B-0 with steel cup
Dimensions (w*h*h)	65x65x48mm
Fixing	Springs
Cutout	Ø51mm

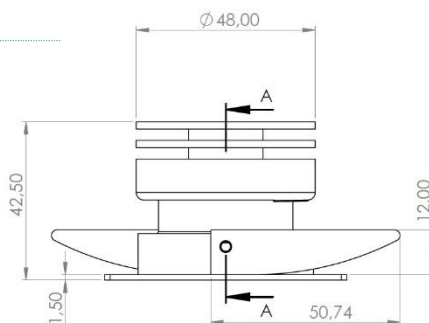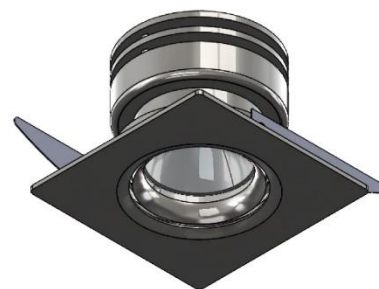

SECTION A-A

TVV Marine Lighting Oy,
Jousitie 2C, 20760 Piispanristi, Finland

mobile : +358 440501007 | info@tvvmarinelighting.com | www.tvvmarinelighting.com

