


## RECESSED LED DOWNLIGHT

### LIGHT SPECIFICATION

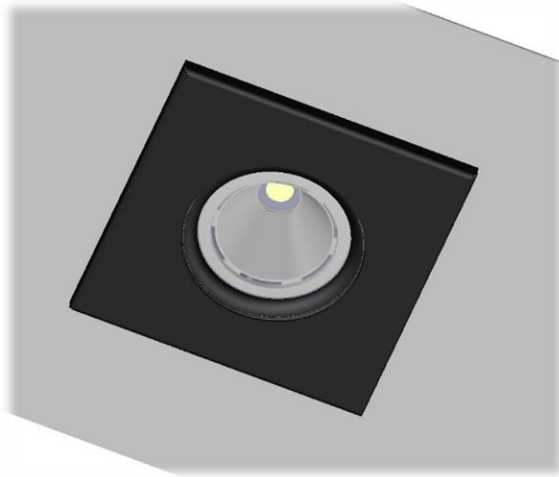

LED module	Philips Fortimo SLM C 930 1203 L09 1619 G7	
Color temp	3000K	
CRI	>90	
Light beam angle	75°	
Reflector	MIRELLA-XW	
Lumen output	995lm	
Luminaire power	9.3W	
Lumen maintenance	Tc nom 55°C	L80B10 – 60 000h
	Tc life 75°C	L70B20 – 60 000h
Working temp. range	-20°C ... +45°C	
Serial connected	No	
Voltage per light	34VDC	
Connectors	-	

### ADDITIONAL SPECIFICATION

Power supply	220-240V 50/60Hz
Driver	Philips Xitanium 10W TE
Dimming	On-Off
Connector	Ensto NAC31S.W & NAD3T.W
Adjustability	Fixed
Trim color	RAL9005 Black
Body material	Steel trim & Aluminium body
Fire class	B0
Dimensions	103x103x84mm
Fixing	Screws
Cutout	ø75mm
Inrush current I <sub>peak</sub>	0.98A
Inrush current T <sub>width</sub>	38μs
MCB 10A type C	≤ 205pcs

